



CLEAR VIEW ALLOY 65

Using smart metal technology, this film rejects a significant amount of heat while allowing visible light to pass through. The smart metals add an elegant shine that can complement exterior aesthetics.

BENEFITS

High performance with a reflective sheen.

Multiple light transmissions available, from clear to dark, for higher privacy needs.

Increases the solar performance of your existing glass.



CLEAR VIEW ALLOY 65

PERFORMANCE DATA

VISIBLE LIGHT:	SINGLE PANE	DUAL PANE
Visible Light Transmitted	65%	58%
Reflected Exterior	16%	23%
Reflected Interior	16%	20%

SOLAR ENERGY:	SINGLE PANE	DUAL PANE
Energy Transmitted	50%	41%
Energy Reflected	23%	23%
Energy Absorbed	27%	36%
UV Rejection	99%	99%
Total Solar Energy Rejected (TSER)	44%	42%
Infrared Heat Rejected	70%	70%
Shading Coefficient	0.65	0.67
Solar Heat Gain Coefficient	0.56	0.58
U Factor	1.00	0.47
Emissivity	0.76	0.76
Glare Reduction	29%	29%

The performance data above was tested according to ASTM & AIMCAL standards. All values represented are as applied on 1/8" (3mm) glass. Specific technical information can be found at WWW.XPEL.COM. For additional information contact SUPPORT@XPEL.COM.

WARRANTY INFORMATION

VISION Films are backed by a comprehensive warranty.



CLEAR VIEW ALLOY 50

Using smart metal technology, this film rejects a significant amount of heat while allowing visible light to pass through. The smart metals add an elegant shine that can complement exterior aesthetics.

BENEFITS

- High performance with a reflective sheen.
- Multiple light transmissions available, from clear to dark, for higher privacy needs.
- Increases the solar performance of your existing glass.



CLEAR VIEW ALLOY 50

PERFORMANCE DATA

VISIBLE LIGHT:	SINGLE PANE	DUAL PANE
Visible Light Transmitted	49%	45%
Reflected Exterior	26%	30%
Reflected Interior	24%	26%

SOLAR ENERGY:	SINGLE PANE	DUAL PANE
Energy Transmitted	35%	30%
Energy Reflected	32%	30%
Energy Absorbed	33%	40%
UV Rejection	99%	99%
Total Solar Energy Rejected (TSER)	57%	51%
Infrared Heat Rejected	82%	82%
Shading Coefficient	0.49	0.56
Solar Heat Gain Coefficient	0.43	0.49
U Factor	0.95	0.46
Emissivity	0.69	0.69
Glare Reduction	45%	44%

The performance data above was tested according to ASTM & AIMCAL standards. All values represented are as applied on 1/8" (3mm) glass. Specific technical information can be found at WWW.XPEL.COM. For additional information contact SUPPORT@XPEL.COM.

WARRANTY INFORMATION

VISION Films are backed by a comprehensive warranty.




CLEAR VIEW ALLOY 40

Using smart metal technology, this film rejects a significant amount of heat while allowing visible light to pass through. The smart metals add an elegant shine that can complement exterior aesthetics.

BENEFITS

- High performance with a reflective sheen.
- Multiple light transmissions available, from clear to dark, for higher privacy needs.
- Increases the solar performance of your existing glass.

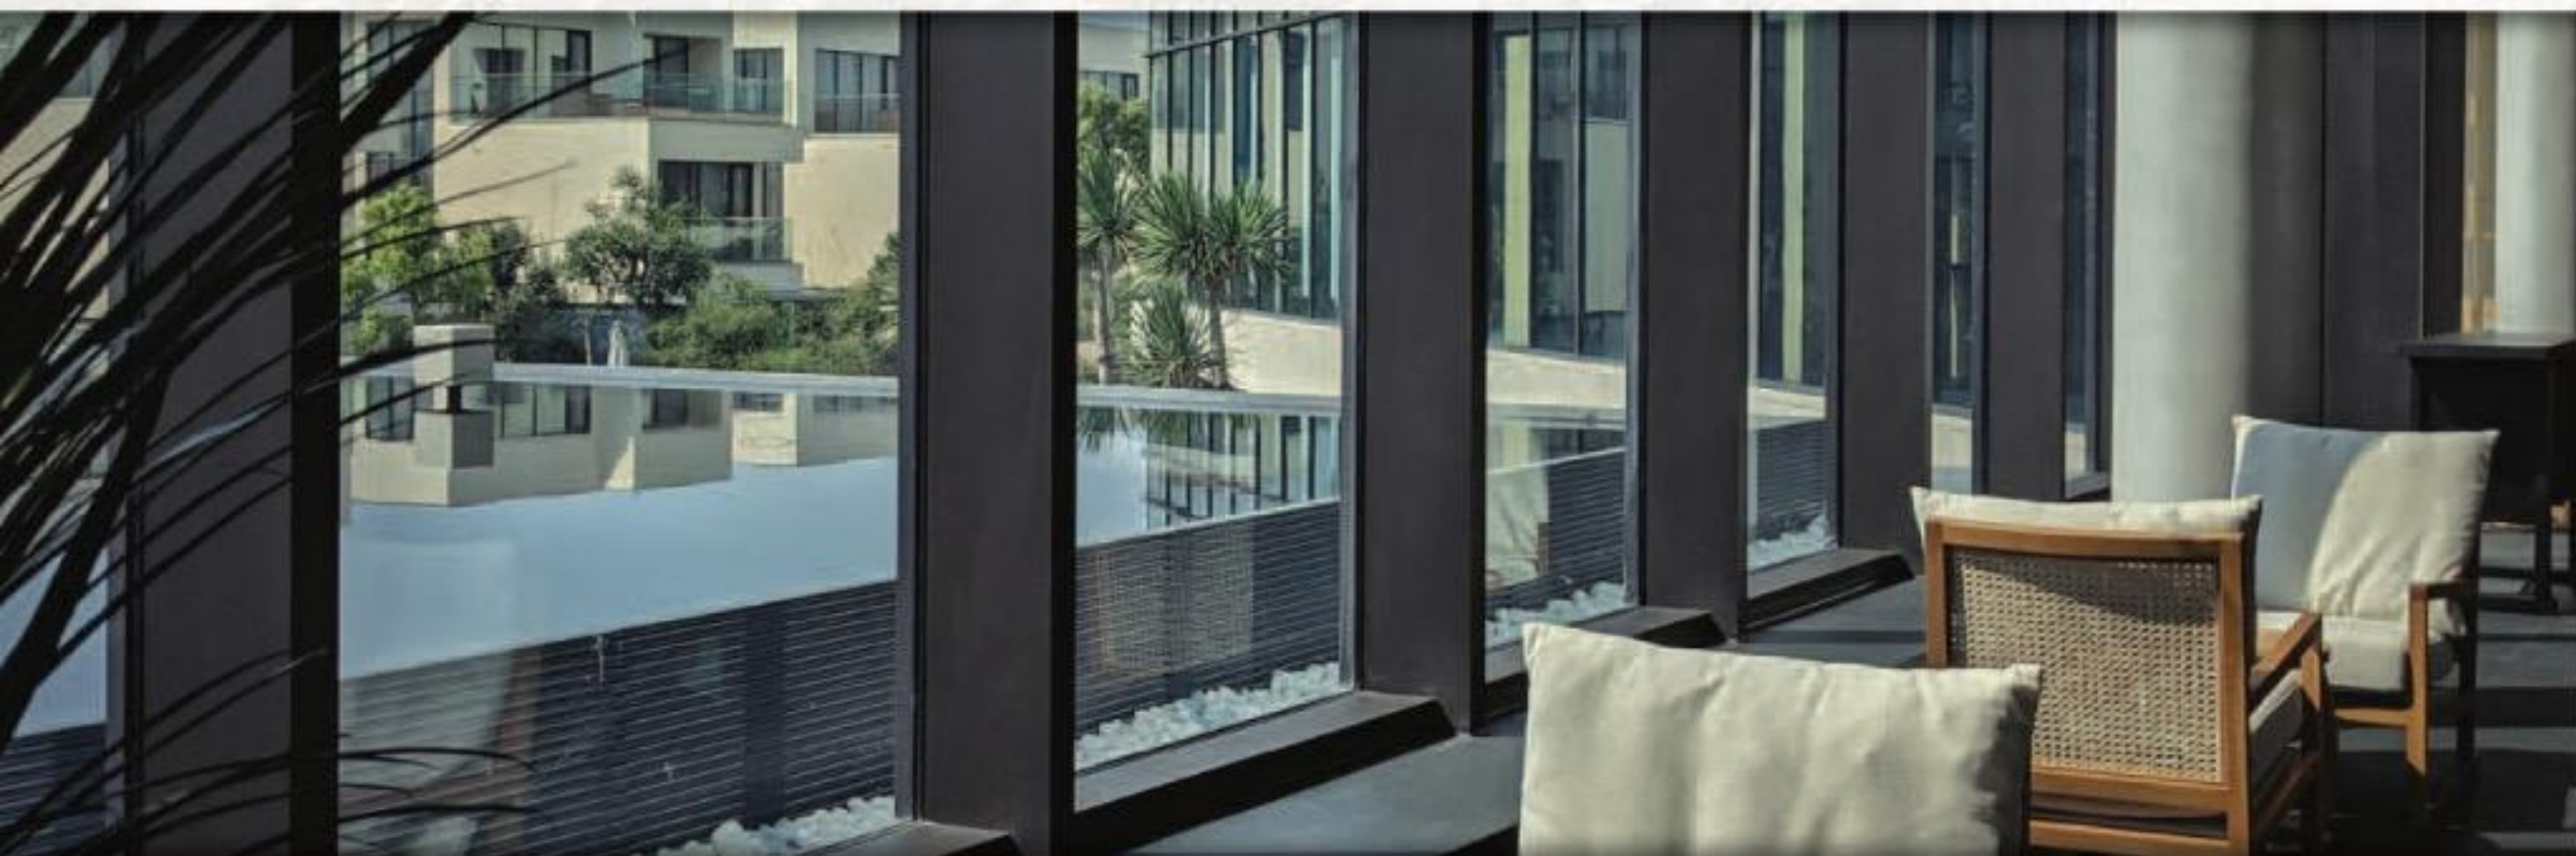

CLEAR VIEW ALLOY 40

PERFORMANCE DATA

	SINGLE PANE	DUAL PANE
VISIBLE LIGHT:		
Visible Light Transmitted	41%	38%
Reflected Exterior	33%	36%
Reflected Interior	29%	31%

	SINGLE PANE	DUAL PANE
SOLAR ENERGY:		
Energy Transmitted	29%	24%
Energy Reflected	39%	34%
Energy Absorbed	32%	42%
UV Rejection	99%	99%
Total Solar Energy Rejected (TSER)	64%	56%
Infrared Heat Rejected	88%	88%
Shading Coefficient	0.41	0.50
Solar Heat Gain Coefficient	0.36	0.44
U Factor	0.95	0.46
Emissivity	0.68	0.68
Glare Reduction	54%	53%

The performance data above was tested according to ASTM & AIMCAL standards. All values represented are as applied on 1/8" (3mm) glass. Specific technical information can be found at WWW.XPEL.COM. For additional information contact SUPPORT@XPEL.COM.

WARRANTY INFORMATION

VISION Films are backed by a comprehensive warranty.




CLEAR VIEW ALLOY 25

Using smart metal technology, this film rejects a significant amount of heat while allowing visible light to pass through. The smart metals add an elegant shine that can complement exterior aesthetics.

BENEFITS

- High performance with a reflective sheen.
- Multiple light transmissions available, from clear to dark, for higher privacy needs.
- Increases the solar performance of your existing glass.

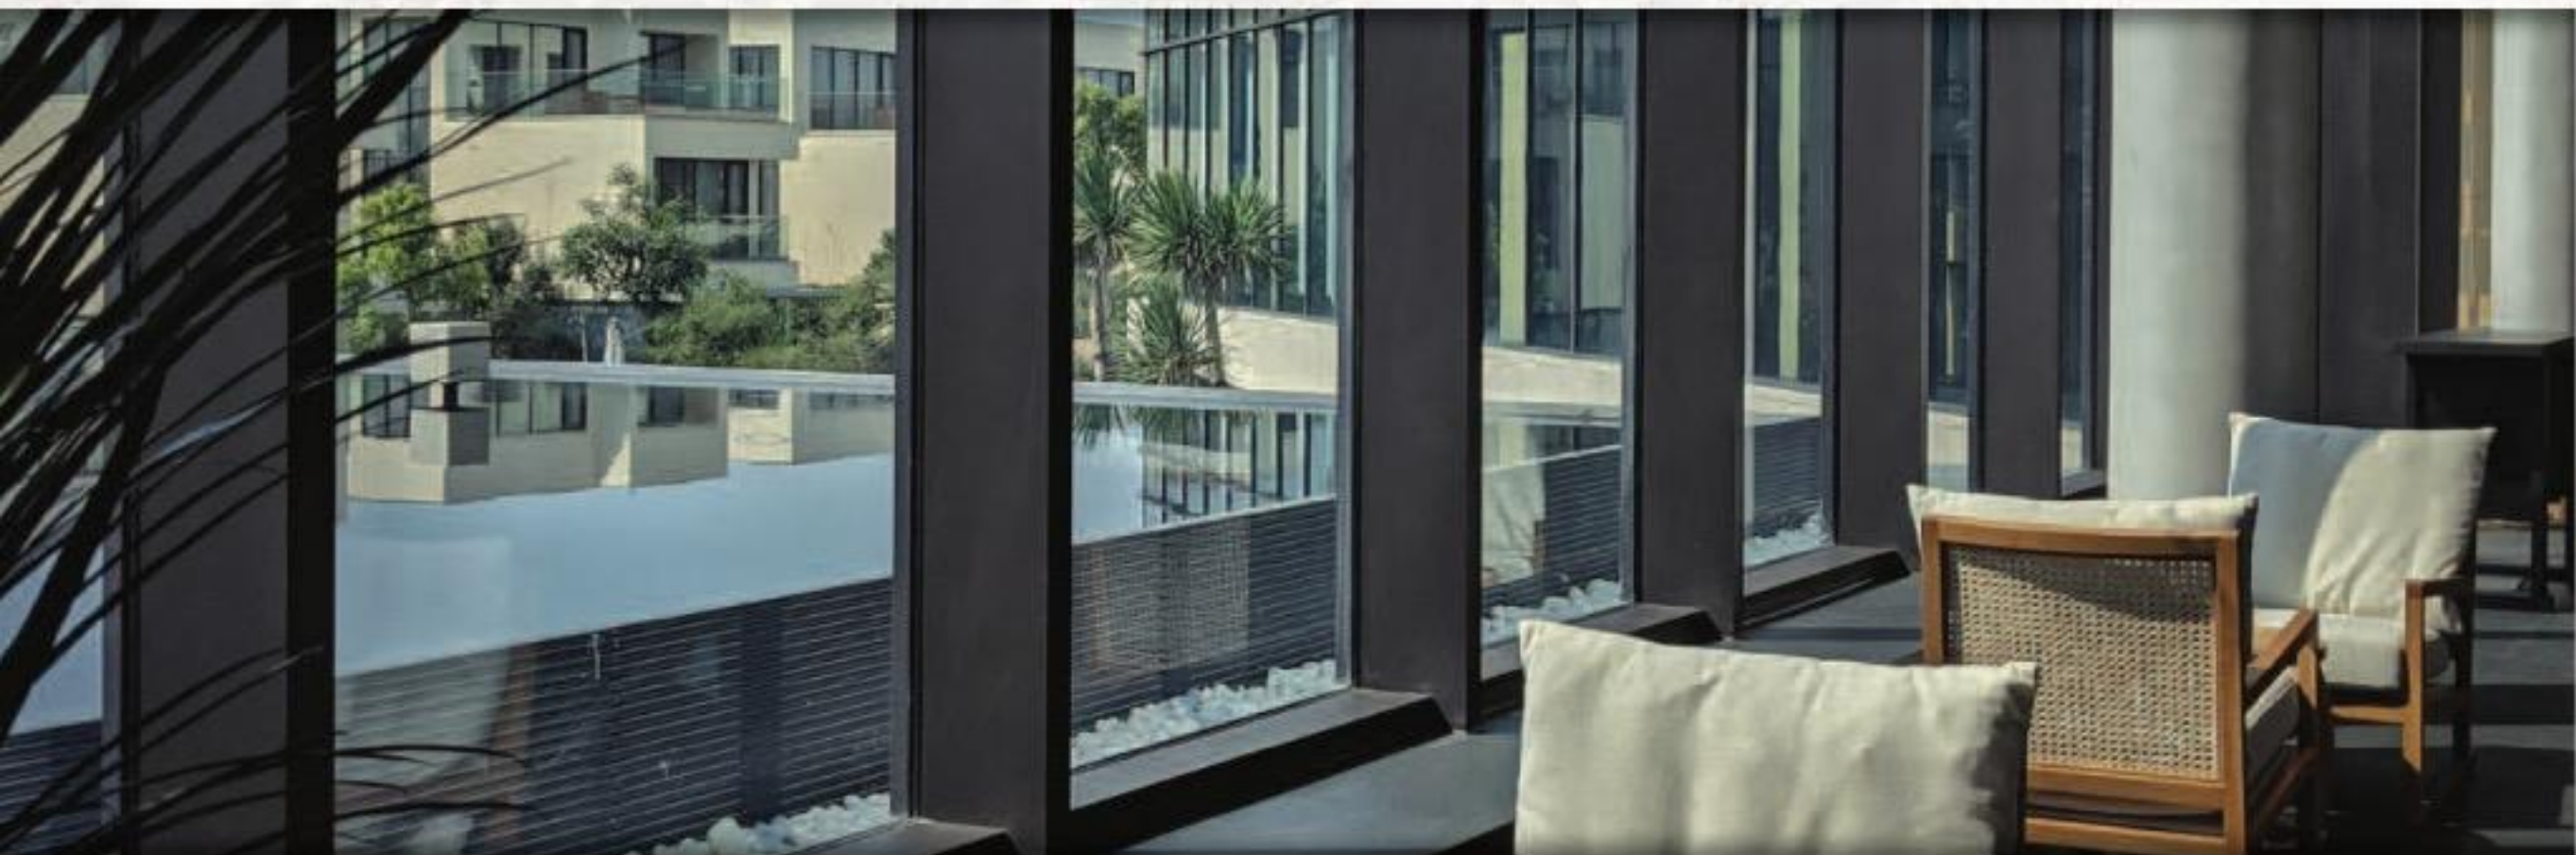

CLEAR VIEW ALLOY 25

PERFORMANCE DATA

VISIBLE LIGHT:	SINGLE PANE	DUAL PANE
Visible Light Transmitted	24%	21%
Reflected Exterior	35%	40%
Reflected Interior	35%	40%

SOLAR ENERGY:	SINGLE PANE	DUAL PANE
Energy Transmitted	17%	13%
Energy Reflected	44%	42%
Energy Absorbed	39%	45%
UV Rejection	99%	99%
Total Solar Energy Rejected (TSER)	74%	66%
Infrared Heat Rejected	92%	92%
Shading Coefficient	0.30	0.39
Solar Heat Gain Coefficient	0.26	0.34
U Factor	0.95	0.45
Emissivity	0.67	0.67
Glare Reduction	75%	75%

The performance data above was tested according to ASTM & AIMCAL standards. All values represented are as applied on 1/8" (3mm) glass. Specific technical information can be found at WWW.XPEL.COM. For additional information contact SUPPORT@XPEL.COM.

WARRANTY INFORMATION

VISION Films are backed by a comprehensive warranty.